



LedKoning

HELDER WIT BASIC STRIP



LEDS
p/m
128

Lumen
p/m
607

Watt
p/m
5,7

4000k

180°

Dimbaar

5
Jaar

CE

SPECIFICATIES

Algemene kenmerken

Dimbaar	Ja	
3M plakstrip over gehele lengte	Ja	
Garantie	5 jaar	
Op maat te knippen	12V: elke 3,125cm	24V: elke 6,25cm

LED's en licht

Aantal LED's p/m	128 leds/m
Type LED	COB
Merk LED	SanAn
Stralingshoek	180°
Kleur	Helder wit
Kleurtemperatuur (Kelvin)	4000K
CRI	>90
Aantal branduren	50.000

Technische specificaties

Lichtsterkte (lumen) p/m	12V: 579,8 lm	24V: 607,9 lm
Voltage (DC)	12V of 24V	
Watt - vermogen p/m	12V: 5,79W	24V: 5,66W
Lumen per watt	12V: 100,14 lm	24V: 107,40 lm
Watt per LED	12V: 0,045W	24V: 0,044W

Strip eigenschappen

Bescherming	IP20, IP65 of IP67		
Materiaal waterdichte bescherming (IP65/IP67)	Siliconen		
Achtergrond kleur strip (PCB)	Wit		
Plakstrip	IP20: 3M 300LSE	IP65: 3M VHB	IP67: 3M VHB
Breedte led strip	IP20: 8mm	IP65: 10mm	IP67: 10mm
Dikte led strip	IP20: 1,3mm	IP65: 4,8mm	IP67: 4,8mm
Aansluiting begin	5.5x2.1 DC stekker type vrouw		
Aansluiting einde	5.5x2.1 DC stekker type man		

DETAILFOTO

IP20



IP65



IP67




SPECTRUM TESTRAPPORTEN

EVERFINE 远方

EVERFINE HAAS-1200 Test Report

1 Of 1

Spectrum Test Report

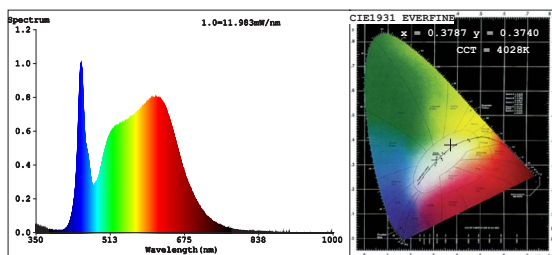

Color Parameters:

Chromaticity Coordinate: $x=0.3787$ $y=0.3740/u'=0.2251$ $v'=0.5001$
 CCT=4028K (Duv=-0.0008) Dominant WL: $\lambda_d=579.4\text{nm}$ Purity=25.9%
 Ratio: R=19.7% G=76.3% B=4.0% Peak WL: $\lambda_p=448.5\text{nm}$ FWHM=19.8nm
 Render Index: Ra=92.7 AvgR=89.4

R1 =93 R2 =95 R3 =95 R4 =94 R5 =93 R6 =92 R7 =94
 R8 =85 R9 =61 R10=87 R11=94 R12=75 R13=94 R14=97 R15=90

Photo Parameters:

Flux = 579.8 lm Eff. : 103.92 lm/W Fe = 1.942 W

Electrical parameters:

V = 11.998 V I = 0.4650 A P = 5.579 W PF = 1.000
 LEVEL:OUT WHITE:ANSI_4000K

Status: Integral T = 273 ms Ip = 35447 (54%)


Model:12v 1281ed 4000k cob Number:16
 Tester: Date:2024-12-05 17:37:24
 Temperature:Deg Humidity:%
 Manufacturer: Remarks:

EVERFINE 远方

EVERFINE HAAS-1200 Test Report

1 Of 1

Spectrum Test Report

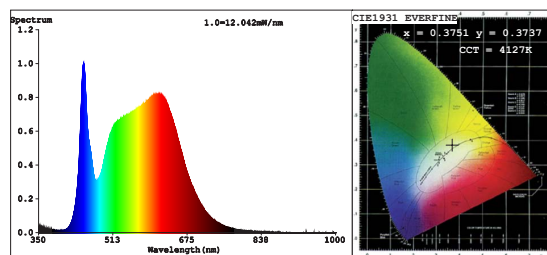

Color Parameters:

Chromaticity Coordinate: $x=0.3751$ $y=0.3737/u'=0.2228$ $v'=0.4994$
 CCT=4127K (Duv=0.0002) Dominant WL: $\lambda_d=578.5\text{nm}$ Purity=24.7%
 Ratio: R=19.3% G=76.6% B=4.1% Peak WL: $\lambda_p=448.8\text{nm}$ FWHM=22.8nm
 Render Index: Ra=92.3 AvgR=88.7

R1 =93 R2 =94 R3 =95 R4 =93 R5 =92 R6 =92 R7 =94
 R8 =85 R9 =59 R10=86 R11=94 R12=74 R13=93 R14=97 R15=89

Photo Parameters:

Flux = 607.9 lm Eff. : 107.34 lm/W Fe = 2.029 W

Electrical parameters:

V = 23.997 V I = 0.2360 A P = 5.663 W PF = 1.000
 LEVEL:OUT WHITE:ANSI_4000K

Status: Integral T = 273 ms Ip = 35791 (55%)

Model:24v 1281ed 4000k cob Number:9
 Tester: Date:2024-12-05 17:00:06
 Temperature:Deg Humidity:%
 Manufacturer: Remarks:

CE CERTIFICAAT

KES TESTING CERTIFICATION • • • KES TESTING CERTIFICATION

Model:DWCB608-01M2420, DWCB608-01M1220, DWCB608-01M1265, DWCB608-02M1220, DWCB608-02M1265, DWCB608-03M1220, DWCB608-03M1265, DWCB608-04M1220, DWCB608-04M1265, DWCB608-05M1220, DWCB608-05M1265, DWCB608-06M2420, DWCB608-06M2465, DWCB608-07M2420, DWCB608-07M2465, DWCB608-08M2420, DWCB608-08M2465, DWCB608-09M2420, DWCB608-09M2465, DWCB608-10M2420, DWCB608-10M2465, HWCB128-01M1220, HWCB128-01M1265, HWCB128-02M1220, HWCB128-02M1265, HWCB128-03M1220, HWCB128-03M1265, HWCB128-04M1220, HWCB128-04M1265, HWCB128-05M1220, HWCB128-05M1265, HWCB128-06M2420, HWCB128-06M2465, HWCB128-07M2420, HWCB128-07M2465, HWCB128-08M2420, HWCB128-08M2465, HWCB128-09M2420, HWCB128-09M2465, HWCB128-10M2420, HWCB128-10M2465, WWCB128-06M2420, WWCB128-06M2465, WWCB128-07M2420, WWCB128-07M2465, WWCB128-08M2420, WWCB128-08M2465, WWCB128-09M2420, WWCB128-09M2465, WWCB128-10M2420, WWCB128-10M2465, WWCB504-01M1220, WWCB504-01M1265, WWCB504-02M1220, WWCB504-02M1265, WWCB504-03M1220, WWCB504-03M1265, WWCB504-04M1220, WWCB504-04M1265, WWCB504-05M1220, WWCB504-05M1265, WWCB504-06M2420, WWCB504-06M2465, WWCB504-07M2420, WWCB504-07M2465, WWCB504-08M2420, WWCB504-08M2465, WWCB504-09M2420, WWCB504-09M2465, WWCB504-10M2420, WWCB504-10M2465, HWCB504-01M1220, HWCB504-01M1265, HWCB504-02M1220, HWCB504-02M1265, HWCB504-03M1220, HWCB504-03M1265, HWCB504-04M1220, HWCB504-04M1265, HWCB504-05M1220, HWCB504-05M1265, HWCB504-06M2420, HWCB504-06M2465, HWCB504-07M2420, HWCB504-07M2465, HWCB504-08M2420, HWCB504-08M2465, HWCB504-09M2420, HWCB504-09M2465, HWCB504-10M2420, HWCB504-10M2465, RWCB888-01M1220, RWCB888-01M1265, RWCB888-02M1220, RWCB888-02M1265, RWCB888-03M1220, RWCB888-03M1265, RWCB888-04M1220, RWCB888-04M1265, RWCB888-05M1220, RWCB888-05M1265, RWCB896-01M2420, RWCB896-01M2465, RWCB896-02M2420, RWCB896-02M2465, RWCB896-03M2420, RWCB896-03M2465, RWCB896-04M2420, RWCB896-04M2465, RWCB896-05M2420, RWCB896-05M2465, RWCB896-06M2420, RWCB896-06M2465, RWCB896-07M2420, RWCB896-07M2465, RWCB896-08M2420, RWCB896-08M2465, RWCB896-09M2420, RWCB896-09M2465, RWCB896-10M2420, RWCB896-10M2465, RDCB840-01M1220, RDCB840-01M1265, RDCB840-02M1220, RDCB840-02M1265, RDCB840-03M1220, RDCB840-03M1265, RDCB840-04M1220, RDCB840-04M1265, RDCB840-05M1220, RDCB840-05M1265, RDCB840-06M2420, RDCB840-06M2465, RDCB840-07M2420, RDCB840-07M2465, RDCB840-08M2420, RDCB840-08M2465, RDCB840-09M2420, RDCB840-09M2465, RDCB840-10M2420, RDCB840-10M2465

Shenzhen KES Testing & Certification Co., LTD
Room 405, Floor 4th, Building C, Yuxing Technology Industrial Park, Xixiang Street, Bao'an District, Shenzhen, Guangdong, China
86-755-23009643 86-755-23009643 <http://www.kaixitest.com>

CE CERTIFICAAT

KES TESTING CERTIFICATION

Certificate of Conformity



Certification No. : KESJC20231009000046482E
Applicant : LedKoning
Address : Rietveldenweg 49D 5222AP DEN BOSCH The Netherlands
Manufacturer : LedKoning
Address : Rietveldenweg 49D 5222AP DEN BOSCH The Netherlands
Certification Marking : CE-EMC
Product Description : LED Strip
Model : See in page 2
Trademark : N/A

The above products have been tested by us with listed standards and found in compliance with the Directive 2014/30/EU. It is possible to use CE marking to demonstrate the compliance with this Directive.

Test Standards	: EN IEC 55015: 2019 + A11:2020 EN 61547: 2009
-----------------------	---

The certificate is based on a single evaluation of tested samples of above-mentioned product. It does not imply an assessment of the whole production and does not permit the use of the test laboratory logo.

CE

Authorized Signer: 
Kevin Liu / Manager
Oct. 12, 2023

Shenzhen KES Testing & Certification Co., LTD
Room 405, Floor 4th, Building C, Yuxing Technology Industrial Park, Xixiang Street, Bao' an District, Shenzhen, Guangdong,
86-755-23009643 86-755-23009643 <http://www.kaixitest.com>


LedKoning

Rietveldenweg 49D
5222AP Den Bosch
Niederlande/Nederland
info@ledkoning.nl
+31 73 704 11 00