



LedKoning

WARM WIT PREMIUM LED STRIP

120
LEDS P/M



Warm Wit






SPECIFICATIES


Dimbaar	Ja		
3M plakstrip over gehele lengte	Ja		
Garantie	5 jaar		
Op maat te knippen	12V: elke 2,5 cm	24V: elke 5 cm	
Aantal LED's p/m	120		
Type LED	3528 SMD		
Merk LED	Epistar		
Stralingshoek	120 graden		
Kleur	Warm Wit		
Kleurtemperatuur (Kelvin)	2700K		
CRI	80		
Lichtsterkte (lumen) p/m	840 lm		
Aantal branduren	50.000		
Voltage (DC)	12V of 24V		
Watt - vermogen p/m	9,2W		
Bescherming	IP20, IP65 of IP67		
Materiaal waterdichte bescherming (IP65/IP67)	Siliconen		
Achtergrond kleur strip (PCB)	Wit		
Plakstrip	IP20: 3M 300LSE	IP65: 3M VHB	IP67: 3M VHB
Breedte led strip	IP20: 8mm	IP65: 10mm	IP67: 10mm
Dikte led strip	IP20: 3mm	IP65: 6mm	IP67: 6mm
Aansluiting begin	5.5x2.1 DC stekker type vrouw 2-pins stekker type vrouw+man		
Aansluiting einde	2-pins stekker type vrouw		

TECHNISCHE TEKENINGEN


IP20 12V

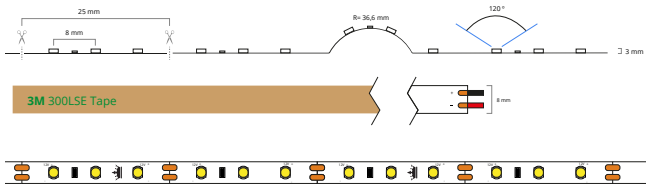


IP65/67 12V

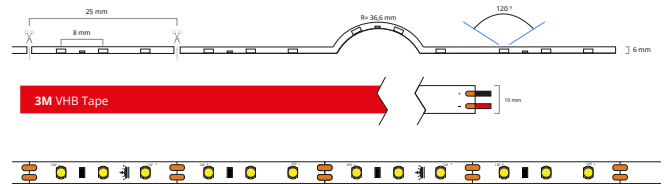

IP20 24V

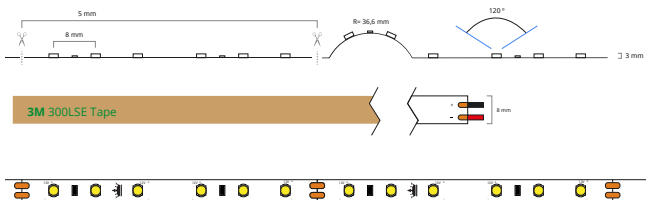

IP65/67 24V

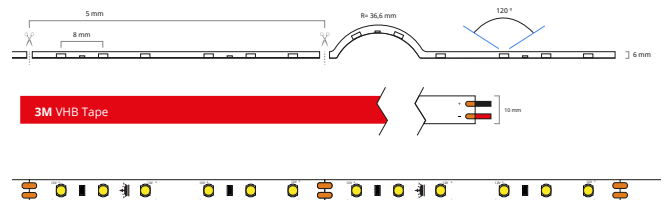

IP20



IP65




IP67





1M Premium - 120 LEDS P/M

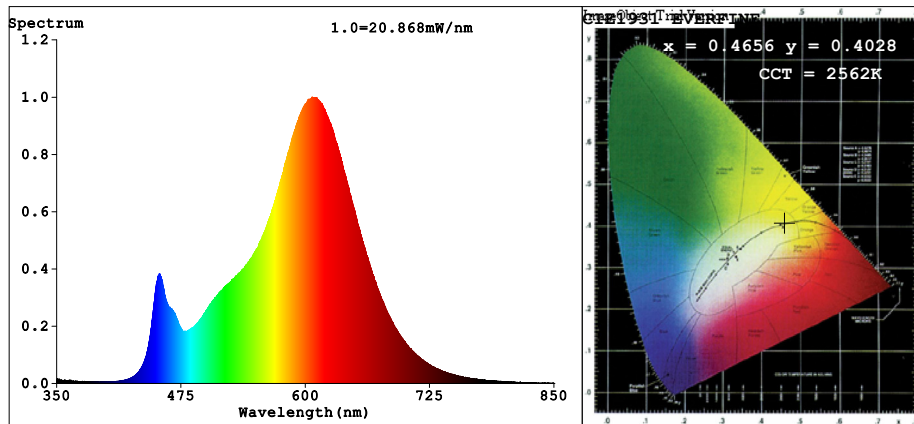

Color Parameters:

Chromaticity Coordinate: $x=0.4656$ $y=0.4028$ / $u'=0.2698$ $v'=0.5252$
 CCT=2562K (Duv=-0.0033) Dominant WL:Ld =586.0nm Purity=60.7%
 Ratio:R=26.8% G=70.7% B=2.5% Peak WL:Lp=607.0nm FWHM=102.2nm
 Render Index:Ra=82.3
 R1 =83 R2 =96 R3 =90 R4 =79 R5 =84 R6 =95 R7 =77
 R8 =54 R9 =7 R10=91 R11=80 R12=84 R13=86 R14=95 R15=74

Photo Parameters:

Flux = 848.0 lm Eff. : 91.90 lm/W Fe = 2.780 W

Electrical parameters:

V = 11.999 V I = 0.7690 A P = 9.227 W PF = 1.000

WHITE:OUT

Status: Integral T = 500 ms Ip = 44780 (68%)



AN TENG TESTING CERTIFICATION

WWW.ANTENGLAB.COM
Tel:86-755-27724522
Fax:86-755-27724533



Model : KWLS60-05M2465;HWLS120-01M1220;HWLS120-02M1220;HWLS120-03M1220;HWLS120-04M1220;HWLS120-05M1220;HWLS120-01M1265;HWLS120-02M1265;HWLS120-03M1265;HWLS120-04M1265;HWLS120-05M1265;HWLS120-01M2420;HWLS120-02M2420;HWLS120-03M2420;HWLS120-04M2420;HWLS120-05M2420;HWLS120-01M2465;HWLS120-02M2465;HWLS120-03M2465;HWLS120-04M2465;HWLS120-05M2465;HWLS60-01M1220;HWLS60-02M1220;HWLS60-03M1220;HWLS60-04M1220;HWLS60-05M1220;HWLS60-01M1265;HWLS60-02M1265;HWLS60-03M1265;HWLS60-04M1265;HWLS60-05M1265;HWLS60-01M2420;HWLS60-02M2420;HWLS60-03M2420;HWLS60-04M2420;HWLS60-05M2420;HWLS60-01M2465;HWLS60-02M2465;HWLS60-03M2465;HWLS60-04M2465;HWLS60-05M2465

Trademark : N/A

Sufficient samples of the product have been tested and found to be in conformity with

Test Standards	EN 55015: 2013+A1:2015 EN 61547: 2009 EN 61000-3-2:2014 EN 61000-3-3: 2013
-----------------------	---

When tested as specified, the submitted sample complies with EMC Directives 2014/30/EU
The certificate is based on a single evaluation of one sample of above-mentioned products. It does not imply an assessment of the whole production and does not permit the use of the test laboratory logo.

CE

Authorized Signer: 

Joseph Yang / Manager
March 13, 2018

Shenzhen An-Teng Testing Service Co., Ltd.
Room715-722, Huafeng Yu'an Business Building, Yu'an 1st Road, Bao'an District, Shenzhen,Guangdong,China.

Adres: Rietveldenweg 49D, 5222AP 's Hertogenbosch
Tel: +3173 704 1100
E-mail: info@ledkoning.nl
Website: www.ledkoning.nl