



LedKoning

CONSTANT CURRENT LEDSTRIP WARM WIT

60
LEDS P/M



Warm wit






SPECIFICATIES


Dimbaar	Ja		
3M plakstrip over gehele lengte	Ja		
Garantie	2 jaar		
Op maat te knippen	elke 5 cm		
Aantal LED's p/m	60		
Type LED	2835 SMD		
Merk LED	Epistar		
Stralingshoek	120 graden		
Kleur	Warm wit		
Kleurtemperatuur (Kelvin)	3000K		
CRI	91.4		
Lichtsterkte (lumen) p/m	470.8 lm		
Aantal branduren	50.000		
Voltage (DC)	24V		
Watt - vermogen p/m	1.691W		
Bescherming	IP20, IP65 of IP67		
Materiaal waterdichte bescherming (IP65/IP67)	Siliconen		
Achtergrond kleur strip (PCB)	Wit		
Plakstrip	IP20: 3M 300LSE	IP65: 3M VHB	P67: 3M VHB
Breedte led strip	IP20: 8mm	IP65: 10mm	IP67: 10mm
Dikte led strip	IP20: 3mm	IP65: 5mm	IP67: 5mm
Aansluiting begin	5.5x2.1 DC stekker type vrouw		
Aansluiting einde	5.5x2.1 DC stekker type man		

TECHNISCHE TEKENINGEN

IP20 24V

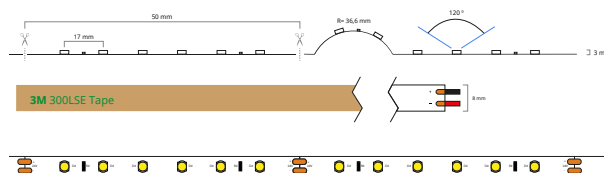

IP65/67 24V

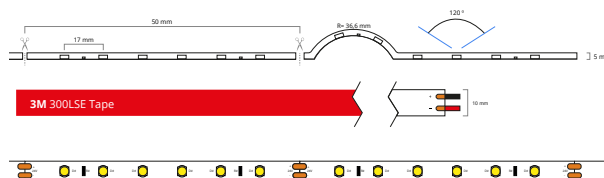

IP20



IP65




IP67





1M HELDER WIT CONSTANT CURRENT - 60 LEDS P/M

Spectrum Test Report

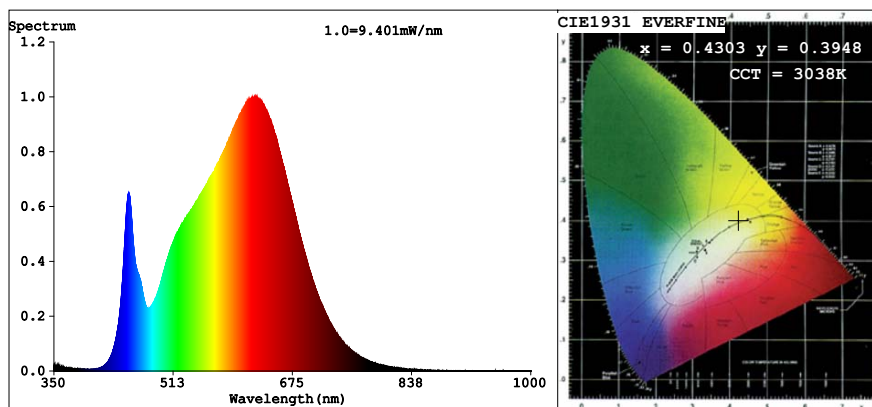

Color Parameters:

Chromaticity Coordinate: $x=0.4303$ $y=0.3948$ / $u'=0.2503$ $v'=0.5167$
 CCT=3038K (Duv=-0.0028) Dominant WL:Ld =583.8nm Purity=47.6%
 Ratio:R=24.3% G=72.8% B=3.0% Peak WL:Lp=625.7nm FWHM=167.8nm
 Render Index:Ra=93.9 CRI=91.4

R1 =95 R2 =97 R3 =97 R4 =94 R5 =94 R6 =95 R7 =93
 R8 =86 R9 =68 R10=92 R11=94 R12=81 R13=96 R14=98 R15=92

Photo Parameters:

Flux = 470.8 lm Eff. : 94.18 lm/W Fe = 1.691 W

Electrical parameters:

V = 23.997 V I = 0.2083 A P = 4.999 W PF = 1.000
 LEVEL:OUT WHITE:ANSI_3000K

Status: Integral T = 416 ms Ip = 54720 (83%)

Model:CC2835-60-WW-20-24-10	Number:1M-3000K
Tester:	Date:2020-10-12 19:10:15
Temperature:Deg	Humidity:%
Manufacturer:RYKER LIGHTING	Remarks:---



CE CERTIFICAAT

AN XIN TESTING CERTIFICATION

Certificate of Conformity



Certification No. : ATT20111100456E

Applicant : Ledkoning

Address : Rietveldenweg 49D
5222AP 's Hertogenbosch, The Netherlands

Manufacturer : Ledkoning

Address : Rietveldenweg 49D
5222AP 's Hertogenbosch, The Netherlands

Certification : CE-EMC

Product Description : 2835 LED Strip

Model : 27KCC60-10M2420,27KCC60-10M2465,27KCC60-15M2420,27KCC60-15M2465,27KCC60-20M2420,27KCC60-20M2465,
27KCC60-30M2420,27KCC60-30M2465,27KCC120-10M2420,27KCC120-10M2465,27KCC120-15M2420,27KCC120-15M2465
30KCC60-10M2420,30KCC60-10M2465,30KCC60-15M2420,30KCC60-15M2465,30KCC60-20M2420,30KCC60-20M2465
30KCC60-30M2420,30KCC60-30M2465,30KCC120-10M2420,30KCC120-10M2465,30KCC120-15M2420,30KCC120-15M2465
40KCC60-10M2420,40KCC60-10M2465,40KCC60-15M2420,40KCC60-15M2465,40KCC60-20M2420,40KCC60-20M2465
40KCC60-30M2420,40KCC60-30M2465,40KCC120-10M2420,40KCC120-10M2465,40KCC120-15M2420,40KCC120-15M2465
BB27K-05M1220,BB30K-05M1220,BB40K-05M1220,BB65K-05M1220

Trademark : N/A

The above products have been tested by us with listed standards and found in compliance with the Directive 2014/35/EU. It is possible to use CE marking to demonstrate the compliance with this Directive.

Test Standards	EN 55015: 2019 EN 61547: 2019 EN 61000-3-2: 2019 EN 61000-3-3: 2013+A1:2019
-----------------------	--

The certificate is based on a single evaluation of tested samples of above-mentioned product. It does not imply an assessment of the whole production and does not permit the use of the test laboratory logo.



Authorized Signer:



Shenzhen An-Xin Testing Service Co., Ltd.

Room 402-405, Floor 4th, Building C, Yuxing Technology Industrial Park, Xixiang Street, Bao'an District, Shenzhen, Guangdong, China
 ☎ 86-0755-23009643 📠 86-0755-23009643 🌐 <http://www.anxinlab.com/>

Adres: Rietveldenweg 49D, 5222AP 's Hertogenbosch
 Tel: +3173 704 1100
 E-mail: info@ledkoning.nl
 Website: www.ledkoning.nl